


# www.ovision.com

## ASTRO-PHYSICS

OPTIQUE&VISION 6 avenue de l'esterel 06160 JUAN LES PINS France

**Tarif 05-2026 en cours modifiable sans préavis (NC : nous contacter)**

**Prix des montures et des instruments valables sur matériels en stock. Il est ensuite défini lors de l'ouverture des commandes de chaque modèle.**

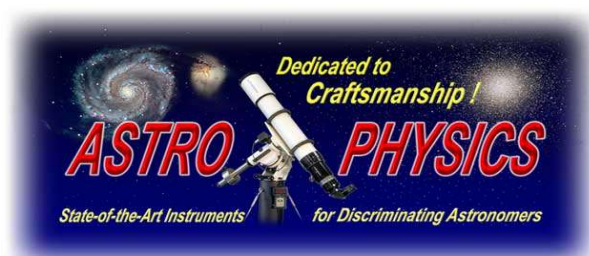

### Désignation

|                                     | Instruments Astro-Physics  | Tarif € HT | Tarif € TTC |
|-------------------------------------|--|------------|-------------|
| 130GTX                              | 130mm f6.3 StarFire GTX, 3.5" Rotating Focuser, Carrying Case, optional 0.71x Quad Telecompressor Corrector for 130GTX or prior 130EDFGT that has been upgraded to 3.5" Rotating Focuser (35FOCER-FT), optional 3.5" Prime Focus Field Flatteners for 130GTX | 9617       | 11541       |
| T13012                              | 130GT and 130GTX Tube Cover #1 for Focuser End of the Tube   | 132        | 158         |
| T13014F-B                           | 130GT and 130GTX Focuser Cover, Felted   | 143        | 172         |
| 110GTX                              | 110mm f6 StarFire GTX with 3.5" Focuser and Case   | 8179       | 9814        |
| 92 Stowaway                         | 92mm f6.65 Stowaway with 2.5" rotating focuser, Pelican case, Vixen style mounting plate   | 5257       | 6309        |
|                                     |  |            |             |
|                                     |  |            |             |
|                                     |  |            |             |
| Montures équatoriales Astro-Physics |  |            |             |
| 1150GTO                             | 1150GTO German Equatorial Mount with GTOCP6, includes APCC-PRO and PEMPro.. Inklus supplément emballage carton et mousses AP. Inklus APCCPRO.  | 14759      | 17711       |
| 1150GTO-AE                          | 1150GTO German Equatorial with Standard Temperature Absolute Encoders and GTCCP6 includes APCC-PRO and PEMPro. Inklus supplément emballage carton et mousses AP.   | 21171      | 25405       |
| 1150GTO-AEL                         | 1150GTO German Equatorial with Extended Temperature Absolute Encoders and GTCCP6 includes APCC-PRO and PEMPro. Inklus supplément emballage carton et mousses AP.   | 21879      | 26255       |
| 1600GTO                             | 1600GTO German Equatorial with GTOCP4 Servo Drive, Includes CD with PulseGuide and PEMPro. Inklus supplément emballage carton et mousses AP.   | NC         | NC          |
| 1600GTO-AE                          | 1600GTO German Equatorial with GTOCP4 Servo Drive and R.A./Dec. Absolute Encoders (Standard Temperature). Includes APCC-Pro. Inklus supplément emballage carton et mousses AP.   | NC         | NC          |
| 1600GTO-AEL                         | 1600GTO German Equatorial with GTOCP4 Servo Drive and R.A./Dec. Absolute Encoders (Extended Temperature).Includes APCC-Pro. Inklus supplément emballage carton et mousses AP.  | NC         | NC          |
| 3600GTO                             | 3600GTO German Equatorial with Servo Drive, Go-To Keypad with Keypad Protector, Cables. Includes PulseGuide and PEMPro v2 CDs. Packing/crating and shipping charges added at time of shipment.   | NC         | NC          |
| 3600GTOPE                           | 3600GTO German Equatorial with Precision Encoder, Servo Drive, Go-To Keypad with Keypad Protector, Cables. Includes: PulseGuide and PEMPro v2 CDs. Packing/crating and shipping charges added at time of shipment.   | NC         | NC          |

|                 |  |       |       |
|-----------------|--|-------|-------|
| Mach2GTO        | Mach2GTO German Equatorial Mount with GTOCP5 and Dual Absolute Encoders (Standard Temp), includes APCC-Pro.  | 14114 | 16937 |
| Mach2GTO – L    | Mach2GTO German Equatorial Mount with GTOCP5 and Dual Absolute Encoders (Extended Temp), includes APCC-Pro.  | 14729 | 17675 |
| KEYVFK2         | GTO Keypad with Keypad Protector for all GTO mounts. Serial # of mount required for purchase.  | 1149  | 1379  |
| GTOCP4          | GTOCP4 Control Box for all GTO Mounts, Includes CONCOVS (Set of Covers) Needs Power Cable (CABPP4SET) and possibly other adapters. Serial # of mount and current control box required for purchase.  | 1501  | 1801  |
| CABPP4SET       | Power Cable Set for GTOCP4. Includes: 6' Cable with PowerPole Connector (CABPP6), 18" Cable with Cigarette Lighter Plug (CABPP18C), 18" Cable with Ring Terminals (CABPP18R), Clip (FPCLIP)  | 169   | 202   |
|                 |  |       |       |
|                 | <b>Accessoires pour modèle Mach1 GTO</b>   |       |       |
| CABGTO24        | 24" Extension Between GTO Control Box and Y-Cable. Useful for low attachment of GTO control box on pier or tripod - for Mach1GTO, 400GTO, 600EGTO mounts   | 199   | 239   |
| CBAPT           | Pier/Tripod Control Box Adapter for GTOCP4, GTOCP3 and GTOCP2. Includes screw packet. For a discussion of options and restrictions, see the Guidelines for Using 6" Trays and the Control Box Adapter.   | 104   | 125   |
| M1RAUP          | Mach1GTO Precision-Adjust Rotating Base/ Hi-Res Azimuth Adjuster Upgrade Kit   | 434   | 521   |
| SM1CSA          | Mach1 GTO Counterweight Shaft Adapter with Stainless Steel Insert  | 138   | 166   |
| MSSKB           | Machined Safety Stop Knob. 5/16"-18 thread. Use on 1.875" diameter, older style counterweight shafts and all 1.125" diameter Counterweight Shafts.   | 51    | 61    |
| SM1GYCR         | Y-Cable for Mach1GTO Mount   | 241   | 289   |
|                 |  |       |       |
|                 | <b>Accessoires pour modèle Mach2 GTO</b>   |       |       |
| CABM2RD22       | 22" Mach2GTO RA/Dec Cable from Backplate to GTOCP5   | 207   | 248   |
|                 |  |       |       |
|                 | <b>Accessoires pour le modèle 1150GTO</b>  |       |       |
| PS24V6APP-A-SET | 24V 6A Power Supply Set with PowerPole Connector and Power Cord for Wall Outlet  | 152   | 182   |
| RAP1150         | Bracket to Attach Right-Angle Polar Alignment Scope Adapter (RAPAS) to 1150GTO Mounts  | 194   | 232   |
|                 |  |       |       |
|                 | <b>Accessoires pour modèle 900 GTO</b>   |       |       |
|                 |  |       |       |
| 119FP           | Flat Pier Plate for 1100GTO and all 900 Mounts - for 8" ATS and other non-Astro-Physics Piers, includes: (8) 1/4-20 x 3/4" SHCS, (6) 5/16 x 5/8" BHS & (6) 5/16 x 9/16 OD x 0.060" flat washer   | 244   | 292   |
| 119FSA          | Flat Surface Adapter for attaching 1100 Mount to a flat surface or 900 Pier Adapter and Wedge to a flat surface. NOT for 800 mounts!   | 224   | 269   |
| 900SPA          | Standard Pier Adapter for 900 Mount, all models.   | 347   | 416   |
| S900CSA         | 900GTO Counterweight Shaft Adapter with Stainless Steel Insert   | 138   | 166   |
| S900GYCR        | Y-Cable for 900GTO Mount with GTOCP4, GTOCP3 or GTOCP2 Control Boxes that are mounted on the RA housing. Cable lengths: RA=14", Dec=39" with cable tie.  | 280   | 337   |
| DOVEKBREP       | Replacement for 900/1200 Dovetail Knob, use during remote observing to reduce risk of cables catching, only 1 needed per mount, SHIPPING EXTRA   | 55    | 66    |
|                 |  |       |       |
|                 | <b>Accessoires pour modèle 1100 GTO</b>  |       |       |
| 119FSA          | Flat Surface Adapter for attaching 1100 Mount to a flat surface or 900 Pier Adapter and Wedge to a flat surface. NOT for 800 mounts!   | 224   | 269   |
| 119FSA-FP       | Flat Surface Adapter with Flat Pier Plate for 1100GTO and all 900 Mounts   | 396   | 475   |
| M11010KIT       | 1100GTO Single Control Box Adapter, includes two 8-32x3/8" Thumbscrews   | 85    | 102   |
| 11AE-4-KIT      | 1100GTO R.A. and Dec. Absolute Encoder and Readhead System, Standard Temperature. Kit installed by customer. Requires GTOCP4 Control Box and Power Cable (CABPP4SET).  | 7430  | 8916  |
| 11AE-4L-KIT     | 1100GTO R.A. and Dec. Absolute Encoder and Readhead System, Extended Temperature. Kit installed by customer. Requires GTOCP4 Control Box and Power Cable (CABPP4SET).  | 8197  | 9836  |
| M9404-B         | 16.975" x 1.875" diameter Stainless Steel Counterweight Shaft. Holds 5, 10, 18 & 24 lb. counterweights. For 900 & 1100 mounts – all models except older 900 mounts with shaft encoders. Also fits 1200 and Mach1GTO. Requires Safety Stop (M12676) and can use | 206   | 247   |

|             |   |      |      |
|-------------|---|------|------|
| Q6281KIT    | Extension to allow 1100GTO Control Box Adapter (single or double) to be used when upsizing pier size to 10 inch diameter or with large custom piers. Includes two 8-32x1/2 inch buttonhead cap screws           | 122  | 146  |
| S1100CSA    | 1100GTO Counterweight Shaft Adapter with Stainless Steel Insert   | 138  | 166  |
| S1100DTP    | 1100GTO Dec Top Plate   | 300  | 360  |
| S1100GYCR42 | Y-Cable w/42" Declination Length for 1100 Quick Release Servo Box (RoHS)  | 274  | 328  |
|             |   |      |      |
|             | <b>Accessoires pour modèle 1200 GTO</b>   |      |      |
| 1612FP      | Flat Pier Plate for 1600GTO and all 1200 Mounts - for 10" ATS and other non-Astro-Physics Piers, includes: (8) 1/4-20 x 3/4" SHCS, (6) 5/16 x 5/8" BHS & (6) 5/16 x 9/16 OD x 0.060" flat washer                | 338  | 406  |
| 1612FSA     | Flat Surface Pier Adapter to attach the following to a flat surface: 1600GTO, 1200 Pier Adapters or Wedge. Note: This part replaces 1200FSA.  | 236  | 283  |
| 1612FSA-FP  | Flat Surface Adapter with Flat Pier Plate for 1600GTO and all 1200 Mounts - for 10" ATS and other non-Astro-Physics piers   | 503  | 604  |
| CBA912KIT   | 90-Degree Dovetail Adapter Plate for 900/1200 RA- mounted GTOCP4, incl. two 10-32 x 3/8" button head cap screws   | 173  | 208  |
| DOVEKBREP   | Replacement for 900/1200 Dovetail Knob, use during remote observing to reduce risk of cables catching, only 1 needed per mount, SHIPPING EXTRA  | 55   | 66   |
| S1200CSA    | 1200GTO Counterweight Shaft Adapter with Stainless Steel Insert   | 138  | 166  |
| S1200GYCR   | Y-Cable for 1200GTO Mount with GTOCP4, GTOCP3 or GTOCP2 Control Boxes that are mounted on the RA housing. Cable lengths: RA=14", Dec=39".   | 280  | 337  |
| 1200SPA     | Standard Pier Adapter for 1200 mount, all models, fits 10" Astro-Physics Piers  | 526  | 631  |
|             |   |      |      |
|             | <b>Accessoires pour modèle 1600 GTO</b>   |      |      |
| 1612FP      | Flat Pier Plate for 1600GTO and all 1200 Mounts - for 10" ATS and other non-Astro-Physics Piers, includes: (8) 1/4-20 x 3/4" SHCS, (6) 5/16 x 5/8" BHS & (6) 5/16 x 9/16 OD x 0.060" flat washer                | 338  | 406  |
| 1612FSA     | Flat Surface Pier Adapter to attach the following to a flat surface: 1600GTO, 1200 Pier Adapters or Wedge. Note: This part replaces 1200FSA.  | 236  | 283  |
| 1612FSA-FP  | Flat Surface Adapter with Flat Pier Plate for 1600GTO and all 1200 Mounts - for 10" ATS and other non-Astro-Physics piers   | 503  | 604  |
| 16AE-4-I    | 1600GTO R.A. and Dec. Absolute Encoder and Readhead System, Standard Temperature. Installed by Astro-Physics at time of mount manufacture.  |      |      |
| 16AE-4-KIT  | 1600GTO R.A. and Dec. Absolute Encoder and Readhead System, Standard Temperature. Kit installed by customer. Requires GTOCP4 Control Box and Power Cable (CABPP4SET)  | 7194 | 8633 |
| 16AE-4L-I   | 1600GTO R.A. and Dec. Absolute Encoder and Readhead System, Extended Temperature. Installed by Astro-Physics at time of mount manufacture.  |      |      |
| 16AE-4L-KIT | 1600GTO R.A. and Dec. Absolute Encoder and Readhead System, Extended Temperature. Kit installed by customer. Requires GTOCP4 Control Box and Power Cable (CABPP4SET)  | 7961 | 9553 |
| S1600CSA    | 1600GTO Counterweight Shaft Adapter with Stainless Steel Insert   | 138  | 166  |
|             |   |      |      |
|             | <b>Accessoires pour modèle 3600 GTO</b>   |      |      |
| 36LSS       | Limit Switch System for 3600GTO - Installation included if purchased with the mount. May be purchased at a later date to be installed by the customer.  | 733  | 879  |
| CAB36LS     | 3600GTO Cable to Connect Limit Switch Connector on Cable Port Plate to GTOELS   | 136  | 163  |
| DOVE3622    | 22" Dovetail Saddle Plate for 3600GTO Mount. Use with 22" or 27" Dovetail Sliding Bar (SB3622 or SB3627)  | 973  | 1167 |
| M3655       | 11.5" Counterweight Shaft Extension for 3600GTO, 2.5" Diameter  | 420  | 504  |
| SB3627      | 27" Dovetail Sliding Bar for 3600GTO. Use with 22" Dovetail Saddle Plate (DOVE3622)   | 903  | 1084 |
|             |   |      |      |
|             | <b>Accessoires et pièces détachées pour montures Astro-Physics, toutes versions confondues</b>  |      |      |
| 12CBKIT     | 1200GTO Quick Release Control Box Adapter Kit, Includes: two 10-32x3/8 socket buttonhead screws, two 8-32x1/4 socket set screws and two 8-32x3/8 thumbscrews  | 161  | 193  |
| 9CBKIT      | 900GTO Quick Release Control Box Adapter Kit, only needed if upgrading from GTOCP1 Control Box, Includes: three 10-32x3/8 socket buttonhead screws, two 8-32x1/4 socket set screws and two 8-32x3/8 thumbscrews | 161  | 193  |
| C0024       | Pouch #2 for Servo Control Box of 400GTO, 600EGTO and Mach1GTO mounts. GTOCP2 or GTOCP3   | 126  | 151  |

|             |   |      |      |
|-------------|---|------|------|
| CAB36LS4    | 30 " Cable to Connect Limit Switch Connector on 3600GTO Cable Port Plate to GTOCP4  | 204  | 245  |
| CAB36PEF    | 3600GTOPE Cable From Precision Encoder to GTOCP4 (original cable for the GTOELS control box cannot be used)   | 206  | 247  |
| CABGTO24    | 24" Extension Between GTO Control Box and Y-Cable. Useful for low attachment of GTO control box on pier or tripod - for Mach1GTO, 400GTO, 600EGTO mounts  | 199  | 239  |
| CABKEY--    | GTO Keypad Extension Cable. Successfully used to 72'. Cannot guarantee longer cables. The two dashes in the part number will be replaced by the length in feet. Lead-free   | NC   | NC   |
| CABLPPFP    | 6' Power Cable with Switchcraft and Powerpole Connectors for GTOCP3, Most Earlier Mounts and Telescope Fans. Includes: Cable w/Clip and Velcro Tie"   | 119  | 143  |
| CABPP123SET | Power Cable Set with Switchcraft and Powerpole Connectors for GTOCP3, Most Earlier Mounts and Telescope Fans. Includes: CABLPFP w/Clip and Velcro Tie, CABPP18R and CABPP18C. "   | 169  | 202  |
| CABPP18C    | 18" Power Cable Extension with Cigarette Ligher Plug and PowerPole Connector. Use with CABPP6.  | 46   | 55   |
| CABPP18R    | 18" Power Cable Extension with Ring Terminals and PowerPole Connector. Use with CABPP6.   | 55   | 66   |
| CABPP4SET   | Power Cable Set for GTOCP4. Includes: 6' Cable with PowerPole Connector (CABPP6), 18" Cable with Cigarette Lighter Plug (CABPP18C), 18" Cable with Ring Terminals (CABPP18R), Clip (FPCLIP)   | 169  | 202  |
| CABPP6      | 6' Power Cable for GTOCP4 with PowerPole Connector. Must use with CABPP18C, CABPP18R or other cable with PowerPole Connector  | 119  | 143  |
| CBAPT       | Pier/Tripod Control Box Adapter for GTOCP4, GTOCP3 and GTOCP2. Includes screw packet. For a discussion of options and restrictions, see the Guidelines for Using 6" Trays and the Control Box Adapter.  | 104  | 125  |
| CONCOVS     | Set of Covers and Plugs for GTO Control Boxes, Including: All Connectors, Interfaces and Drainage Holes. Add Shipping.  | 36   | 44   |
| KEYPRO      | Rugged Rubber GTO Keypad Protector. Thick rubber casing protects your keypad if dropped. Included with purchase of new mount or keypad.   | 134  | 160  |
| KEYVFK2     | GTO Keypad with Keypad Protector for all GTO mounts. Serial # of mount required for purchase.   | 1149 | 1379 |
| S1200GYCR   | Y-Cable for 1200GTO Mount with GTOCP4, GTOCP3 or GTOCP2 Control Boxes that are mounted on the RA housing. Cable lengths: RA=14", Dec=39".   | 280  | 337  |
| S900GYCR    | Y-Cable for 900GTO Mount with GTOCP4, GTOCP3 or GTOCP2 Control Boxes that are mounted on the RA housing. Cable lengths: RA=14", Dec=39" with cable tie.   | 280  | 337  |
| SGYCR2345   | Y-Cable for 900GTO Mount. Ideal for Pier-mounted GTOCP4, GTOCP3 or GTOCP2 Control Boxes. Cable lengths: RA=23", Dec=45"   | 284  | 341  |
| SGYCR2950   | Y-Cable for 1200GTO Mount. Ideal for Pier-mounted GTOCP4, GTOCP3 or GTOCP2 Control Boxes. Cable lengths: RA=29.5", Dec=50.5"  | 288  | 346  |
|             |   |      |      |
|             | <b>Accessoires mécaniques pour montures Astro-Physics</b>   |      |      |
|             | <b>Contrepoids, barres de contrepoids, viseur polaire</b>   |      |      |
|             | <b>*** Le prix des contrepoids n'est valable qu'avec l'achat groupé d'une monture de la gamme ***</b>   |      |      |
| 10SCWT      | 10 lb. Stainless Steel Counterweight for 1.875" Shaft - for 900, 1100, 1200 & 1600 mounts (and Mach1GTO with optional shaft)  | 434  | 521  |
| 14SLCWT     | 14 lb. Stainless Steel Counterweight for 1.125" Shaft - 400,600E,800 and Mach1 Mounts   | 480  | 576  |
| 18SCWT      | 18 lb. Stainless Steel Counterweight for 1.875" Shaft - for 900, 1100, 1200 & 1600 Mounts (and Mach1GTO using optional shaft)   | 512  | 614  |
| 30SCWT188   | 30 lb. Stainless Steel Counterweight for 1.875" Shaft - for Mach2, 900, 1100, 1200 & 1600 mounts  | 717  | 861  |
| 33SCWT      | 33 lb. Stainless Steel Counterweight for 2.5" Shaft - 3600GTO and 3600GTOPE   | 740  | 888  |
| 5SCWT       | 5 lb. Stainless Steel Counterweight for 1.875" Shaft - for Mach2, 900, 1100, 1200 & 1600 Mounts (and Mach1GTO using optional shaft)   | 390  | 468  |
| 6SLCWT      | 6 lb. Stainless Steel Counterweight for 1.125" Shaft - for 400, 600E, 800, and Mach1 Mounts   | 390  | 468  |
| 9SLCWT      | 9 lb. Stainless Steel Counterweight for 1.125" shaft - for 400, 600E, 800, and Mach1 Mounts   | 424  | 508  |
| M12601-E    | 22" x 1.875" diameter Stainless Steel Counterweight Shaft. Holds 5, 10, 18 or 24lb. counterweights. For 1600 and 1200 mount – all models. Also fits 900 & 1100 mounts – all models except older 900 mounts with shaft encoders. Requires Safety Stop (M12676) a | 371  | 446  |

|             |   |     |     |
|-------------|---|-----|-----|
| M12675      | 9.25" x 1.875" diameter counterweight shaft extension. Holds 5, 10, 18, 24 or 30 lb. counterweights. Fits all counterweights shafts with a thread I.D. of approximately 1" – NOT for other shafts. Requires Safety Stop (M12676).                               | 319 | 383 |
| M12676      | Counterweight Shaft Safety Stop, One-Piece, Washerless. Fits all counterweights shafts with a thread I.D. of approximately 1" – NOT for other shafts.   | 97  | 116 |
| M2043       | 13.7" x 1.875" Diameter Counterweight Shaft, Stainless Steel. Holds 5, 10, 18 & 30 lb. counterweights. This version ships with the Mach2GTO. For 900 & 1100 mounts – all models except older 900 mounts with shaft encoders. Also fits 1200 and Mach1GTO. Re    | 338 | 406 |
| M3655       | 11.5" Counterweight Shaft Extension for 3600GTO, 2.5" Diameter  | 420 | 504 |
| M8084-B     | 14.5" x 1.125" diameter counterweight shaft. Holds 6 or 9 lb. counterweights. For Mach1GTO mount. Also fits 400, 600. OK with shaft encoders. Requires a Safety Stop Knob (MSSKB - recommended) or Safety Knob (SCWTKB) and Safety Washer 5/16" (or 11/32") ID  | 286 | 343 |
| M9404-B     | 16.975" x 1.875" diameter Stainless Steel Counterweight Shaft. Holds 5, 10, 18 & 30 lb. counterweights. For 900 & 1100 mounts – all models except older 900 mounts with shaft encoders. Also fits 1200 and Mach1GTO. Requires Safety Stop (M12676) and can use  | 352 | 422 |
| MSSKB       | Machined Safety Stop Knob. 5/16"-18 thread. Use on 1.875" diameter, older style counterweight shafts and all 1.125" diameter Counterweight Shafts.  | 51  | 61  |
| 47RING      | 4.7" Mounting Rings for 130 f6.3 StarFire EDF "Gran Turismo" or other telescopes with 4.7" diameter tubes. These rings are too small for the original 130 f6 StarFire model that has a 5.5" diameter tube.  | 486 | 583 |
| 55RING2     | 5.5" Mounting Rings for 130 StarFire GTX and 130 StarFire EDT/EDF refractors or other telescope tubes of 5.5" diameter. Sept 2015 style features new top-of-ring hole pattern and taller base for increased clearance   | 560 | 672 |
| 63HANDLE    | Handle with 6.3" Spacing, Ideal for Stowaway or 130 Refractor, includes (2), 1/4-20 x 1.25" SHCS  | 156 | 187 |
| Q12700      | Polar Scope Cover for 900 Mounts Shipped Before October 2005, all 400 and most 1200 Mounts (except original black metric version). Thread diameter of opening approx 3.25".   | 121 | 145 |
| Q16030      | Losmandy Polar Alignment Scope Adapter for 1100 & 1600 mounts. Purchase this if you already own a Losmandy Polar Scope.   | 97  | 116 |
| Q8140-A     | Losmandy Polar Alignment Scope Adapter - for all past and present models of 400,600,600E,800,900 and 1200 mounts (except the first black 1200 mounts that were produced).   | 117 | 140 |
| RAP1200     | Right-Angle Polar Alignment Scope Adapter for 1200GTO Mounts. Includes Cap (Q16106)   | 206 | 247 |
| RAP900      | Right-Angle Polar Alignment Scope Adapter for 900GTO Mounts. Includes Cap (Q16106)  | 180 | 215 |
| RAPAS       | Right-Angle Polar Alignment Scope with LED Illuminator - 1100GTO, 1600GTO, Mach1GTO and all 900 and 1200 Mounts (except the early black version). Some of these mounts require adapters.  | 554 | 665 |
| RAPM1       | Right-Angle Polar Alignment Scope Adapter for Mach1GTO Mounts. Includes Cap (Q16106)  | 180 | 215 |
| RAPM2       | Bracket to Attach Right-Angle Polar Alignment Scope Adapter to Mach2GTO Mounts  | 218 | 261 |
|             |   |     |     |
|             | <b>Trépieds et adaptateurs</b>  |     |     |
|             |   |     |     |
| 119FP       | Flat Pier Plate for 1100GTO and all 900 Mounts - for 8" ATS and other non-Astro-Physics Piers, includes: (8) 1/4-20 x 3/4" SHCS, (6) 5/16 x 5/8" BHS & (6) 5/16 x 9/16 OD x 0.060" flat washer  | 244 | 292 |
| 119FSA      | Flat Surface Adapter for attaching 1100 Mount to a flat surface or 900 Pier Adapter and Wedge to a flat surface. NOT for 800 mounts!  | 224 | 269 |
| 119FSA-FP   | Flat Surface Adapter with Flat Pier Plate for 1100GTO and all 900 Mounts - for 8" ATS and other non-Astro-Physics piers. No modification needed for standard 1/8" wall piers. Must be shipped to ATS for proper fitting to pier. Will need to be modified by AT | 396 | 475 |
| 142085KBKIT | 1/4-20 x .85" Plastic Knob Kit, set of 3, included with Eagle Pier 8" Extension (EAGLE6E8) and Losmandy to AP Tripod/Pier Adapter (LM2APT). You may wish to consider the black-anodized, machined version of these knobs (M1485KBKIT) instead.                  | 92  | 110 |
| 1612FP      | Flat Pier Plate for 1600GTO and all 1200 Mounts - for 10" ATS and other non-Astro-Physics Piers, includes: (8) 1/4-20 x 3/4" SHCS, (6) 5/16 x 5/8" BHS & (6) 5/16 x 9/16 OD x 0.060" flat washer  | 338 | 406 |
| 1612FSA     | Flat Surface Pier Adapter to attach the following to a flat surface: 1600GTO, 1200 Pier Adapters or Wedge. Note: This part replaces 1200FSA.  | 236 | 283 |
| 1612FSA-FP  | Flat Surface Adapter with Flat Pier Plate for 1600GTO and all 1200 Mounts - for 10" ATS and other non-Astro-Physics piers   | 503 | 604 |

|  |   |      |      |
|--|---|------|------|
| ADATRI   | Flat Surface Adapter to attach 400, 600E, and Mach1 to a flat surface.  | 190  | 228  |
| C0031  | Soft-sided Carrying Case for 6" Eagle Pier, 32" Long, for use in shortest position  | 397  | 477  |
| C0052  | Soft-sided Carrying Case for 6" Eagle Pier, 52" Long, for use when wanting to keep Eagle Pier in extended positions.  | 536  | 643  |
| EAGLE6-EZ                                      | 6" Eagle Adjustable Folding Pier  | 2879 | 3455 |
| EAGLE4   | 4" Extension for all 6" Piers, Tripods and ADATRI from AP, includes (3) Knobs & (3) 1/4-20x3/4" Button Socket Head Cap Screw and Washers  | 434  | 521  |
| EAGLE6E8                                       | 8" Extension for 6" Eagle Pier, includes (3) Knobs, and (3) 1/4-20x5/8 button socket head screw with washer.  | 541  | 650  |
| LM2APT   | Adapter to attach Losmandy G11 mount to Astro-Physics Tripod, 6" Portable Pier or Eagle Adjustable Folding Pier, w/ Knobs for pier / tripod. Does NOT include knobs for mount (LTKS).   | 211  | 253  |
| LT2APM   | Adapter to attach Losmandy HD Tripod or Tripod with Losmandy MA Top to Astro-Physics 400, 600, 1100, 900 and Mach1 Mounts. Includes screw packet.   | 199  | 239  |
| M1485KBKIT                                     | 1/4-20 Machined Knob Kit, set of three black-anodized, aluminum knobs with tapered shanks for Mach1GTO, 400, 600 and 600E mounts, EAGLE6E8, and LM2APT. Threaded portion of knob is 0.85" long. Includes washers.   | 86   | 103  |
| <b>Adaptateurs modifiés version ATS</b>        |   |      |      |
| 119FP  | Flat Pier Plate for 1100GTO and all 900 Mounts - for 8" ATS and other non-Astro-Physics Piers, includes: (8) 1/4-20 x 3/4" SHCS, (6) 5/16 x 5/8" BHS & (6) 5/16 x 9/16 OD x 0.060" flat washer  | 244  | 292  |
| 1612FP   | Flat Pier Plate for 1600GTO and all 1200 Mounts - for 10" ATS and other non-Astro-Physics Piers, includes: (8) 1/4-20 x 3/4" SHCS, (6) 5/16 x 5/8" BHS & (6) 5/16 x 9/16 OD x 0.060" flat washer  | 338  | 406  |
| <b>Accessoires pour trépieds Astro-Physics</b> |   |      |      |
| CBAPT  | Pier/Tripod Control Box Adapter for GTOCP4, GTOCP3 and GTOCP2. Includes screw packet. For a discussion of options and restrictions, see the Guidelines for Using 6" Trays and the Control Box Adapter.  | 147  | 176  |
| Q6280KIT                                       | Extension to allow Control Box Adapter (CBAPT) to be used with Berlebach tripods and when upsizing to 8 inch diameter pier. Includes one 5/16-18x5/8 inch buttonhead screw and one 5/16 inch ID x 9/16 inch OD x 0.060 inch flat washer                         | 122  | 146  |
| Q6281KIT                                       | Extension to allow 1100GTO Control Box Adapter (single or double) to be used when upsizing pier size to 10 inch diameter or with large custom piers. Includes two 8-32x1/2 inch buttonhead cap screws   | 122  | 146  |
| TRAY06   | Pier Accessory Tray for tripods & 6" diameter piers including 6" Eagle (needs TRAYSB or TRAYSB1 sold separately) For a complete discussion of options and restrictions, see the Guidelines for Using 6" Trays and the Control Box Adapter                       | 161  | 193  |
| TRAY06H  | Eyepiece Accessory Tray for tripods & 6" diameter piers including 6" Eagle (needs TRAYSB or TRAYSB1 sold separately) Features two 2" and three 1.25" holes for eyepieces. For a complete discussion of options and restrictions, see the Guidelines for Using 6 | 177  | 212  |
| TRAY08   | Pier Accessory Tray for 8" diameter pier (needs TRAYSB) For use with 32", newer 42", 48", 54" and 62" Astro-Physics Portable Piers. Older 42" piers without added mounting holes will need modification by owner. Call Astro-Physics for details. For shorter A | 170  | 204  |
| TRAY08H  | Eyepiece Accessory Tray for 8" Pier, Features Four 2" and Three 1.25" Holes for Eyepieces. For use with 32", newer 42", 48", 54" and 62" Astro-Physics Portable Piers. Older 42" piers without added mounting holes will need modification by owner.            | 177  | 212  |
| TRAY10   | Pier Accessory Tray for 10" diameter pier (needs TRAYSB). For use with 32", newer 42", 48", 54" and 62" Astro-Physics Portable Piers. Older 42" piers without added mounting holes will need modification by owner. Call Astro-Physics for details. For shorter | 180  | 215  |
| TRAY10H  | Eyepiece Accessory Tray for 10" Pier (needs TRAYSB). Features Five 2" and Six 1.25" Holes for Eyepieces. For use with 32", newer 42", 48", 54" and 62" Astro-Physics Portable Piers. Older 42" piers without added mounting holes will need modification by ow  | 185  | 222  |
| TRAYSB   | Bi-Level Support Bar for Two Pier Accessory Trays (needs any AP Accessory Tray(s) sold separately) For 6" pier applications (incl. EAGLE6), see the accessory guidelines chart. For use with 32", newer 42", 48", 54" and 62" Astro-Physics 6", 8" & 10" Portab | 119  | 143  |

|   |   |     |     |
|---|---|-----|-----|
| TRAYSB1   | Single-Level Support Bar for one accessory tray. (needs any A-P Accessory Tray sold separately) For tripod and 6" pier applications (incl. EAGLE6), see the accessory guidelines chart. For use with 32", newer 42", 48", 54" and 62" Astro-Physics 6", 8" & 10 | 111 | 134 |
| <b>Platines coulissantes mâles, queues d'arondes femelles</b> |   |     |     |
| 1200RP15  | 15" Ribbed Mounting Plate for 1200 and 1600 Mounts for 155EDF/EDFS, 160EDF and 140 EDF/EDFS and scopes of similar size.   | 325 | 390 |
| ACSD07  | 7" V-Style Light-weight Dovetail Accessory Saddle (Needs Dovetail Bar), includes (2) 1/4-20 x 5/8" Flat Head Socket Cap Screws. Perfect for 92mm Stowaway, 130 StarFire GT/GTX or any mounting rings with center 1/4-20 hole, rings spaced 6.3" apart.          | 211 | 253 |
| DOVEDV10  | 10" Saddle Plate for Both D-Style and V-Style Bars. Suitable for Mach2, Mach1, 600E, 400, 900 and 1100 mounts. Features 3 clamps.   | 370 | 443 |
| DOVELM162   | 16" Easy-Balance Dovetail Saddle Plate with 3 clamps. Suitable for 1600, 1100, 1200, 900 and Mach1 mounts. Can also be used with 3600GTO when attached to 22" or 27" Dovetail Sliding Bars (SB3622 or SB3627) in side-by-side configuration. The 3-clamps make  | 470 | 565 |
| DOVEPW  | 16.5" P-Style Dovetail Saddle Plate with Four Clamps. Suitable for 3600GTO, 1600GTO and 1200 Mounts. Use with 7.65" Dovetails including SBPW23 and plates made by Planewave Instruments.  | 818 | 982 |
| DOVESP  | 8" Dovetail Mounting Plate with Adapters for Super Polaris Mount (needs SB0800 or SB1000 sliding bar)   | 214 | 256 |
| Q4045   | Adapter to use DOVE08, DOVE15, DOVELM2, DOVELM w/ Takahashi EM-10 Mount (needs one of these plates and corresponding sliding bar)   | 102 | 123 |
| SB0800  | 7" Sliding Bar/Mounting Adapter - Multi-use (To use with DOVE08 for 105 Traveler, StarFire 130EDFS, TeleVue Genesis SDF, TeleVue 101, TeleVue Renaissance refractors or to mount Traveler on heavy-duty camera tripod or LMDUP (using special screws), has 1/4- | 122 | 146 |
| SBD12   | 12" Sliding Bar for DOVELM2, DOVELM162 (version with 3 clamps only) and other Losmandy D-Series Style Dovetails. NOT suitable for DOVELM16, DOVELM16S and DOVELM162 version with 2 clamps.  | 236 | 283 |
| SBD13SS   | 13" Side-by-Side D-Series Style Dovetail Plate. Attach any two of these dovetails: DOVE08, DOVELM2, DOVELM162, DOVELM16, DOVELM16S and DOVELM (Cannot be used with DOVE15)  | 236 | 283 |
| SBD16   | 16" Versatile Dovetail Plate for DOVELM2, DOVELM162 (including previous versions) and other Losmandy D-Series Style Saddle Plates. Plate compatible with AP 6.3" and 13.75" ring spacings. Accepts most current rings including the 14" rings for the 305 mm f3 | 248 | 297 |
| SBD18SS   | 18" Side-by-Side Dovetail Plates for D-Style Dovetail Saddles   | 265 | 318 |
| SBDAPB  | Astro-Physics Riser Blocks, set of 2. Use with 16" Universal Sliding Bar (SBD16) & Astro-Physics Mounting Rings. These blocks are not required for normal use of the SBD16, but are used when you want to raise up one pair of mounting rings in order to use a | 180 | 215 |
| SBDTB   | Takahashi Adapter Blocks-Use w/16" Universal Sliding Bar (SBD16) & ring sets having fastener spacing at 180mm (optical axis) by 48mm-152mm in width. Including Takahashi Mewlon, BRC and FRC, set of two  | 161 | 193 |
| SBPW23  | 23" P-Style Dovetail Plate, 7.65" Wide. Attachment holes for wide variety of mounting rings. Can also use as side-by-side plate. Fits into P-Style Saddle Plate (DOVEPW).   | 635 | 762 |
| SBV08   | 8" Vixen-Style Dovetail Sliding Bar with AP 6.3" hole placement and versatile slots. Designed for small scopes, such as the Stowaway and Traveler. Can be used with all Vixen-style dovetail systems.   | 136 | 163 |
| SBV15   | 15" V-Style Wide Dovetail Bar for DOVEDV10 and other V-Style Saddle Plates  | 156 | 187 |
| <b>Connectivité informatique pour CP2, CP3, CP4, CP5</b>      |   |     |     |
| CABSER15  | 15' Straight-through Serial Cable, DB9 Male/DB9 Female  | 36  | 44  |
| <b>Accessoires visuels</b>                                    |   |     |     |
| A3251-C   | Finder Bracket Male Dovetail Base (needs QRBASEM or previous QRBASE or QRBASES)   | 59  | 70  |
| BARADV  | 2" Advanced Convertible Photo-Visual Barlow (includes part ADA202)  | 334 | 401 |
| PMDMAX  | MAXBRIGHT 2" Mirror Diagonal with Dielectric Coating and Brass Locking Ring. Does NOT include 1.25" adapter (ADA125).   | 461 | 553 |

|              |   |      |      |
|--------------|---|------|------|
| QRBASEG      | Base for 10 x 60 Quick Release Guider Bracket, can also be used with S860QRM, S1050QRM & accessories that use Male Dovetail Base (A3251-B), including STARFMD and QWIKMD  | 123  | 147  |
| QRBASEM      | Multi Radius Base for Quick Release Finder Bracket & Accessories using Male Dovetail Base (A3251-B), including STARFMD. It replaces earlier QRBASE, QRBASES-A and QRBASED   | 112  | 135  |
| QRBATAK      | Takahashi Adapter for Guidescope Dovetail Base (QRBASEG) with Fasteners, (4) 10-32 x 5/8" Button Head Socket Cap Screws and (2) 5mm x 16mm Socket Head Cap Screws   | 69   | 83   |
| S1060QRGB    | 10 x 60 Quick Release Guider Bracket. Needs QRBASEG   | 318  | 382  |
| S1060QRM     | 10x60 Quick Release Finder Bracket. Needs QRBASE or QRBASES   | 212  | 254  |
| PICQRM2      | Picatinny Male Dovetail Base for Multi-Reticle Reflex Finders (Needs QRBASEM or previous QRBASE or QRBASES)   | 87   | 105  |
|              |   |      |      |
|              | <b>Accessoires pour imagerie photo et CCD</b>   |      |      |
|              |   |      |      |
| 92FF         | Field flattener for 92mm Stowaway   | 756  | 907  |
| 92TCC        | 0.8x telecompressor for 92mm Stowaway   | 756  | 907  |
| 110TCC       | 0.83x CCD Telecompressor Corrector for 110mm f/6 StarFire GTX   | 1807 | 2169 |
| 110FF        | 1.10x Field Flattener for 110GTX  | 1167 | 1400 |
| 27TVPH       | 2.7" Photo-Visual Telecompressor (0.75x) (must use with 35mm Camera Adapter listed below)   | 376  | 451  |
| 13027FF-EDFS | 2.7" Prime Focus Field Flattener for Legacy StarFire f6 EDFs Refractors   | 1138 | 1365 |
| 13027FF-GT   | 2.7" Field Flattener w/ 6x7cm Pentax Prime Focus Camera Adapter for 130 f/6.3 StarFire GT with 2.7" Focuser   | 1138 | 1365 |
| 13035FF-2    | 3.5" Prime Focus Field Flattener for 130GTX serial # 130GTX-600 to 130GTX-899<br>** Dew shield does NOT have a thumbscrew. Assembled with: EXT327-17.0  | 1138 | 1365 |
| 13035FF-3    | 3.5" Prime Focus Field Flattener for 130GTX serial # 130GTX-900 and higher. ** GTX dew shields HAVE a thumbscrew. Also for any 130EDFGT upgraded to 3.5" Focuser. Assembled with EXT327-17.0  | 1138 | 1365 |
| 14035FF      | 3.5" Prime Focus Field Flattener for 140 TEC Refractors or 140 StarFire with 4" or 3.5" Focuser. Includes set of spacers: SRSET-327   | 1138 | 1365 |
| 67PF582      | 2.7" Field Flattener w/ 6x7cm Pentax Prime Focus Camera Adapter- 130 StarFire EDT, 155 StarFire EDFs, Star12ED, Star130ED & 140 StarFire EDFs.  | 1138 | 1365 |
| A1225        | Cover for Astro-Physics 2.7" Field Flattener Threaded Side and Other Accessories with 2.7" Male Thread  | 86   | 103  |
| A1226F       | Cover for Astro-Physics 2.7" Field Flattener Bayonet Side, Felted. Fits all field flatteners and other parts with 6x7 outer bayonet.  | 103  | 124  |
| ADA2003A     | 2" Adapter with Brass Locking Ring and Three Custom Machined 1/4-28 x 0.8" Thumbscrews  | 119  | 143  |
| ADA2767      | 6x7 Outer Bayonet for AP 2.7" Thread - attaches 6x7 Pentax, 67RT, 67RTEOS, ADA671, ADA672, A1261, A1262 and custom adapters to AP 2.7" Thread (including 27TVPH)  | 143  | 171  |
| ADA35STL     | 3.5" Focuser to SBIG STL Camera Adapter, incl. (4) 6-32x1/2" Sockethead Cap Screws  | 137  | 165  |
| ADA671       | Adapter to attach STL with 8-position Color Filter Wheel to AP 2.7" & 4" FF and 6x7 Adapters, includes (4) 6-32x1/2 SHCS, overall length 1.580"   | 112  | 135  |
| ADA672       | Adapter to attach STL with 5-position Color Filter Wheel to AP 2.7" & 4" FF and 6x7 Adapters, includes (4) 6-32x1/2 SHCS, overall length 1.930"   | 112  | 135  |
| BARADV       | 2" Advanced Convertible Photo-Visual Barlow (includes part ADA202)  | 334  | 401  |
| CSET27FF     | Covers for Astro-Physics 2.7" Field Flatteners with 6x7 Outer Bayonet, set of 2.  | 173  | 207  |
| QRBATAK      | Takahashi Adapter for Guidescope Dovetail Base (QRBASEG) with Fasteners, (4) 10-32 x 5/8" Button Head Socket Cap Screws and (2) 5mm x 16mm Socket Head Cap Screws   | 69   | 83   |
|              |   |      |      |
|              | <b>Adaptateurs mécaniques pour la photographie</b>  |      |      |
|              |   |      |      |
| 67RLEOS      | SLR Camera Adapter (35mm and digital) with large 1.875" (47.6mm) diameter EOS bayonet for Canon auto-focus EOS SLR cameras. Minimizes vignetting on full frame chips by eliminating T-thread interface. NOT for Canon manual-focus 35mm cameras. To be used w | 226  | 272  |

|            |  |        |        |
|------------|--|--------|--------|
| 67RLNIK    | Nikon Camera Adapter with 1.875" (47.6mm) Diameter Stainless Steel Bayonet. To be used with 2.7" and 4" Prime Focus Field Flatteners. If you received your 2.7" Field Flattener prior to May 1994, you will need new aluminum parts to use this adapter. Note: Use ADATCCNIK for 175FF, 160FF and 13035FF CCD Field Flatteners.  | 226    | 272    |
| 67RT       | SLR Camera Adapter (35mm and digital) without T-ring. Use with 2.7" and 4" Field Flatteners (except 160FF). If you received your 2.7" Field Flattener prior to May 1994, you will need new aluminum parts to use this adapter.   | 102    | 122    |
| EPCT       | Eyepiece Projection SLR Camera Adapter w/o T-ring, for use with SLR (35mm & Digital) Cameras or Small CCD Cameras using a 2" Nosepiece   | 135    | 162    |
| EPCTMIN    | Eyepiece Projection Camera Adapter w/Minolta T-ring, for use with 35mm Cameras or Small CCD Cameras using a 2" Nosepiece   | 163    | 196    |
| EPCTOLY    | Eyepiece Projection SLR Camera Adapter w/Olympus T-ring, for use with SLR (35mm & Digital) Cameras or Small CCD Cameras using a 2" Nosepiece   | 163    | 196    |
| EPCTPTS    | Eyepiece Projection Camera Adapter w/Pentax S T-ring, for use with 35mm Cameras or Small CCD Cameras using a 2" Nosepiece  | 163    | 196    |
| PFCLEOS    | Canon EOS Camera Adapter with 2" Nosepiece and large 1.875" (47.6mm) diameter EOS bayonet to eliminate full-frame sensor vignetting  | 201    | 242    |
| PFCLNIK    | Nikon Camera Adapter with 2" Nosepiece and 1.875" (47.6mm) Diameter Stainless Steel Bayonet  | 201    | 242    |
|            |  |        |        |
|            | <b>Accessoires pour imagerie numérique CCD</b>   |        |        |
|            |  |        |        |
| QUADTCC155 | 0.72x Quad Telecompressor Corrector for 155 f7 StarFire. Requires Either 3.5" Focuser or S35RFAA Adapter for 4" Focuser  | Arrêté | Arrêté |
| A1260      | 0.5" CCD Adapter for older SBIG ST configurations with gap-mounted color filter wheel and for use with extensions to create intermediate spacings. Use with 2.7" or 4" Field Flattener or with 6x7 Outer Bayonet Adapter (ADA2767)   | 94     | 113    |
| EXT48-12.7 | 2" Nosepiece Extension with 48mm Threads (formerly A3703)  | 77     | 92     |
| ADA2767    | 6x7 Outer Bayonet for AP 2.7" Thread - attaches 6x7 Pentax, 67RT, 67RTEOS, ADA671, ADA672, A1260, A1261, A1262 and custom adapters to AP 2.7" Thread (including 27TVPH)  | 143    | 171    |
| ADATCC2    | Adapter to attach 175FF, 160FF, 175TCC, 160TCC or 155TCC to camera with 2" nosepiece. DO NOT use with nosepieces longer than 1" when using any of the TCC Telecompressors. Please review spacing requirements for CCD Field Flatteners and Telecompressor Corre  | 119    | 143    |
| ADATCC3    | Adapter to attach 175FF, 160FF, 175FF, 160TCC or 155TCC to SBIG STL Series CCD camera with 8-position filter wheel. Includes four 6-32x1/2" screws.  | 104    | 125    |
| ADATCCEOS  | SLR Camera Adapter (35mm and digital) with large 1.875" (47.6mm) diameter EOS bayonet for Canon auto-focus EOS SLR cameras. To be used with 175FF, 160FF, 175TCC, 160TCC and 155TCC only. Minimizes vignetting on full frame chips by eliminating T-thread interface and provides perfect spacing for these Field Flatteners and Telecompressor-Correctors. NOT for Canon manual-focus 35mm cameras. | 226    | 272    |
| ADATCCNIK  | Nikon Camera Adapter with 1.875" (47.6mm) Diameter Stainless Steel Bayonet - for use with the 175FF, 160FF, 13035FF and the 175TCC, 160TCC, 155TCC and all QUADTCC Telecompressor Correctors.  | 226    | 272    |
| DSL25EOS   | Canon EOS Wide-Mouth Adapter for the 92FF and 92TCC and large 1.875" (47.6mm) diameter EOS bayonet to minimize full-frame sensor vignetting. This is a DoveLoc accessory and must be used with the 92mmf66 Stowaway or with either 2525EC or 2725EC  | 226    | 272    |
| DSL25NIK   | Nikon Wide-Mouth Adapter for the 92FF and 92TCC and large 1.875" (47.6mm) diameter EOS bayonet to minimize full-frame sensor vignetting. This is a DoveLoc accessory and must be used with the 92mmf66 Stowaway or with either 2525EC or 2725EC  | 226    | 272    |
| AP16T      | 2"/T-2 Tapered Nosepiece for CCD Cameras, SBIG ST7, Baader Planetarium Giant Binocular Viewer or any item with T-2 threads. Fits into 2" openings, 48mm filter threads, I.D. painted flat-black. Compatible with all compression/locking rings.  | 86     | 103    |
| CCDT67     | CCD Telecompressor for SBIG CCD Cameras. Clear aperture is 1.75". Compression ratio is 0.67x with SBIG ST7/8/10 + Color Filter Wheel installed, 0.75x without the Color Filter Wheel. Suitable for telescopes with focal lengths of f7 to f18 including Maksutov   | 226    | 272    |
| QUADTCC    | 0.72x Quad Telecompressor Corrector (order appropriate backfocus spacer extension) (formerly sold with backfocus spacer)   | Arrêté | Arrêté |

|              |  |        |        |
|--------------|--|--------|--------|
| S35RFAA      | 3.5" Rotating Focuser Accessory Adapter. Required for QUADTCC for TEC Refractors   | 169    | 202    |
|              |  |        |        |
|              | <b>Focuseurs, adaptateurs mécaniques, tubes allonges</b>   |        |        |
|              |  |        |        |
| 27FOC3E-FT   | 2.7" Focuser with Feather Touch Micro 9:1 Dual-Speed Knobs, greaseless drawtube with mm focusing scale, includes 2" and 1.25" adapters   | 1653   | 1984   |
| 27FTMU       | Feather Touch Micro Upgrade for 2.7" and Traveler Focusers, can only be retrofit on to Astro-Physics refractors and focusers shipped since July 2001. We will ask for the serial number to be sure. Please read product description carefully to see which pre | 822    | 987    |
| 35FOCER3-FT  | 3.5" Rotating Focuser with FeatherTouch Micro 9:1 Dual-Speed, includes 2.7"/2"/1.25" Adapters. Upgrade for 130 StarFire GT "Gran Turismo"  | 2213   | 2655   |
| S35FOCER-FT  | 3.5" Rotating Focuser with FeatherTouch Micro 9:1 Dual-Speed, Includes Endcap, no adapters. Part # A5012 (3.5" fo 2.7" adapter) purchased separately. 2" and 1.25" adapter can be swapped from previous focuser.   | 2048   | 2457   |
| A5071        | 3.5" Focuser Drawtube Dust Cap   | 43     | 51     |
| 4FTMU        | Feather Touch Micro Assembly Upgrade for Astro-Physics 4" Focusers with Stepped Pinion Block. Please read product description carefully to see which previous focusers can be upgraded   | Arrêté | Arrêté |
| A1005        | 2.7" Threaded Cover (for Female Threads). Fits 2.7" Drawtube, 27TVPH, and all other accessories with 2.7" female threads )   | 60     | 72     |
| A1025-B      | Adapter to use 2.7" Focuser - 2.7" overall length (between focuser adapter and focuser)  | 137    | 165    |
| A2558        | 2" Nosepiece with 2.156" Threads for QSI and SBIG CCD Cameras and 48mm Filter Threads.   | 93     | 111    |
| A3512-A      | Adapter to attach QSI's 500 Series WSG Cameras to Astro-Physics 2.7" and 4" Prime Focus Field Flatteners   | 119    | 143    |
| ADA27-2156   | Step-Down Adapter with 2.7" male threads to 2.156" male threads  | 86     | 103    |
| ADA27-42     | Step-Down Adapter with 2.7" male threads to 42mm male threads  | 112    | 135    |
| ADA27-48     | Step-Down Adapter with 2.7" male threads to 48mm male threads  | 112    | 135    |
| ADA27-48ST   | Step-Down Adapter with 2.7" Male Threads to 48mm Male Threads for 92mm Stowaway  | 149    | 179    |
| ADA27-54     | Step-Down Adapter with 2.7" Male Threads to 54mm Male Threads  | 112    | 135    |
| ADA27-54ST   | Step-Down Adapter with 2.7" Male Threads to 54mm Male Threads for 92mm Stowaway  | 149    | 179    |
| ADA27-68     | Step-Down Adapter with 2.7" Male Threads to 68 mm Male Threads   | 112    | 135    |
| ADA27-68ST   | Step-Down Adapter with 2.7" Male Threads to 68mm Male Threads for 92mm Stowaway  | 149    | 179    |
| ADA327-27    | Allows 2.7" accessories to be attached to the 3.27" threads of CCD Flatteners & Telecompressor Correctors (ADA327-27) Allows 2.7" accessories to be attached to the 3.27" threads of CCD Flatteners & Telecompressor Correctors                                | 114    | 136    |
| ADA327-27- L | Allows 2.7" Accessories to be Attached to the 3.27" Threads of 110FF and 110TCC with ZWO Cameras   | 139    | 166    |
| ADA327-48    | Step-Down Adapter from 3.27" to 48mm for CMOS or CCD   | 122    | 146    |
| ADA327-54    | Step-Down Adapter from 3.27" to 54mm for CMOS or CCD   | 122    | 146    |
| ADA327-68    | Step-Down Adapter from 3.27" to 68mm for CMOS or CCD   | 122    | 146    |
| EXT27-15.2   | 15.2mm Extension for 2.7" Thread (formerly A3505)15.2mm Extension for 2.7" Thread (formerly A3505)   | 69     | 83     |
| EXT27-19.1   | 19.1mm Extension for 2.7" Thread (formerly A3503-A)  | 69     | 83     |
| EXT27-22.9   | 22.9mm Extension for 2.7" Thread (formerly A3506)  | 69     | 83     |
| EXT27-27.0   | 27.0mm Extension for 2.7" Thread   | 76     | 91     |
| EXT27-31.8   | 31.8mm Extension for 2.7" Thread (formerly A3504-A)  | 76     | 91     |
| EXT27-44.5   | 44.5mm Extension for 2.7" Thread (formerly A3502-A)  | 76     | 91     |
| EXT27-64.8   | 64.8mm Extension for 2.7" Thread (formerly A1008-A)  | 93     | 111    |
| EXT327-14.7  | 14.7 mm Backfocus Spacer Extension for 110TCC, 3.27" Thread  | 119    | 143    |
| EXT327-16.0  | 16.0 mm Backfocus Spacer Extension for QUADTCC, 3.27" Thread (formerly A5023)  | 119    | 143    |
| EXT327-17.0  | 17.0 mm Backfocus Spacer Extension for QUADTCC, 3.27" Thread (formerly A5022)  | 119    | 143    |
| EXT327-18.3  | 18.3 mm Backfocus Spacer Extension for QUADTCC, 3.27" Thread (formerly A2680)  | 119    | 143    |
| EXT327-22.1  | 22.1mm Backfocus Spacer Extension for QUADTCC, 3.27" Thread (formerly A5020)   | 119    | 143    |

|             |   |      |      |
|-------------|---|------|------|
| EXT327-34.1 | 34.1 mm Backfocus Spacer Extension for QUADTCC, 3.27" Thread (formerly A2681)   | 128  | 154  |
| A3512-A     | Adapter to attach QSI's 500 Series WSG Cameras to Astro-Physics 2.7" and 4" Prime Focus Field Flatteners  | 119  | 143  |
| EXT48-12.7  | 2" Nosepiece Extension with 48mm Threads (formerly A3703)   | 77   | 92   |
| ADA125      | 1.25" Adapter with Brass Locking Ring   | 80   | 96   |
| ADA2003A    | 2" Adapter with Brass Locking Ring and Three Custom Machined 1/4-28 x 0.8" Thumbscrews  | 119  | 143  |
| ADA20132    | Thin 2" Adapter with brass locking ring and 3 large thumbscrews. Use when you need 11/32" more in-travel. Threads into drawtube of 2.7" or adapter of 4" focuser.   | 104  | 125  |
| ADA202      | 2" Extension Tube with brass locking ring, 1.75" long, 48mm threads (this is also part of our Convertible Barlow)   | 112  | 135  |
| ADA204      | 2" Adapter to use SCT accessories, threads into drawtube of 2.7" Focuser and Traveler, has SCT threads on accessory side, ideal for securing the Adaptive Optics (AO) from SBIG. Also threads into adapter of 4" Focuser.   | 68   | 81   |
| ADA35DL-27  | 3.5" Focuser Doveloc to 2.7" Female Thread Adapter. Net Spacing Distance: 0.281" (7.14mm) (formerly A5012)  | 114  | 136  |
| ADA435      | 4" to 3.5" Adapter with Thumbscrews for 4" Focuser to use QUADTCC   | 204  | 245  |
| ADA4F-35F   | Allows the 3.5" Focuser to be installed on Starfire 155 & Starfire 180 in place of 4" Focusers  | 131  | 157  |
| ADASCT      | 2" Visual back threads onto 9.25" or smaller SCT standard rear cell. Use with 2" accessories that slip in, i.e. 2" diagonal, Barlow or 2" eyepiece. Features brass locking ring. Also fits DayStar T-Scanner cover that has male T-thread.                                  | 93   | 111  |
| ADASCTLC    | 2" Visual back threads onto the 3.25" rear cell of the Celestron 11" or 14" SCTs. Use with 2" accessories that slip in, i.e. 2" diagonal, Barlow or 2" eyepiece, Baader FFC Barlow, CCD camera. Features brass locking ring and 3 large thumbscrews.                        | 119  | 143  |
| ADASCTLC27  | 2.7" Adapter-threads onto 3.25" rear cell of 11", & 14" Celestron SCTs to use Astro-Physics 2.7" Accessories, i.e. 2.7" Telecompressor (27TVPH) and various extensions with the same thread.  | 137  | 165  |
| ADASCTLM    | 2" Visual back threads onto 3.25" rear cell of the 10" or larger Meade SCTs. Use with 2" accessories that slip in, i.e., 2" Diagonal, Barlow or 2" eyepiece, Baader FFC Barlow, CCD camera. Features brass locking ring and 3 large thumbscrews. (also sold as              | 119  | 143  |
| ADASCTLM27  | 2.7" Adapter-threads onto 3.25" back of most 10+" Meade SCTs to use Astro-Physics 2.7" Accessories, i.e. 2.7" Telecompressor (27TVPH) and various extensions with the same thread.  | 137  | 165  |
| EXTTLR      | 2" Extension tube with brass locking ring, 3.6" long  | 163  | 196  |
| SRSET-27    | 2.7" Spacer Rings , 1mm Thick, Set of 3 Rings   | 48   | 58   |
| SRSET-327   | 3.27" Spacer Rings , 1mm Thick, Set of 3 Rings (formerly A5025SET)  | 48   | 58   |
| I27FOC3E-FT | Internal Threaded 2.7" Focuser with Feather Touch Micro 9:1 Dual-Speed Knobs, greaseless drawtube with mm focusing scale, includes 2" and 1.25" adapters. Can be used as a replacement for Traveler Focuser (NOTE: It is engraved with "Astro-Physics", but not "Traveler") | 1653 | 1984 |
| S35RFAA     | 3.5" Rotating Focuser Accessory Adapter. Required for QUADTCC for TEC Refractors  | 169  | 202  |
|             |   |      |      |